



# Heavy duty laminating machine


Automatic feed / Automatic breaking / Automatic measuring paper

**8 Minutes quick heat up**



**Expandable module**

- New exterior design
- Digital control pressure
- 12levels anti-curltechnology
- Adjustable laminating speed
- Touch screen control
- Automatic measuring paper
- 8 minutes quick heat up
- Oversize steel roll
- Automatic breaking
- Intelligent operating system
- Optional paper feeder
- Optional paper trimmer

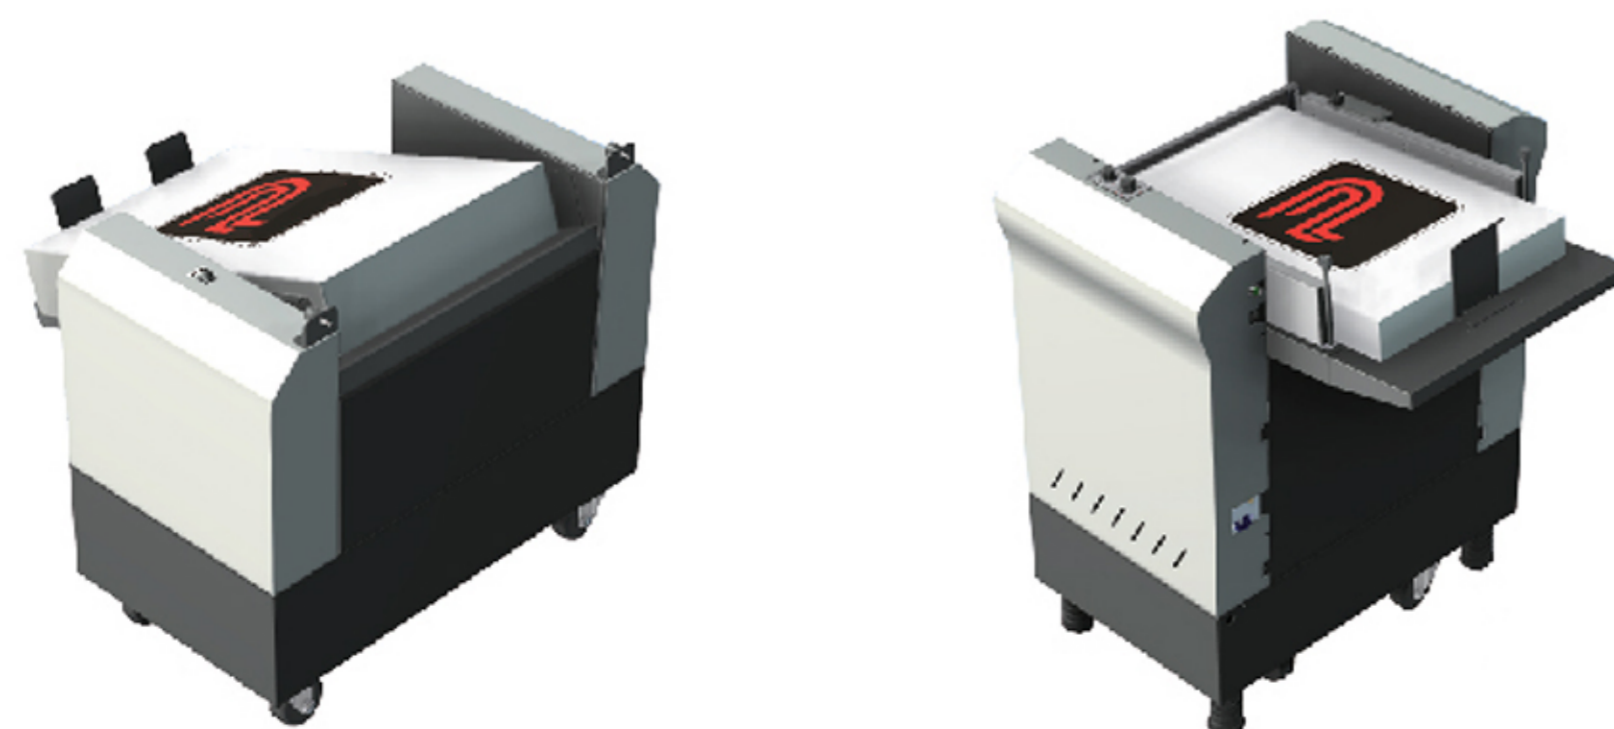


### Automatic feed

Super suction, automatic feed paper, stable and reliable, not into two.



### 12 gear anti-roll adjustment

Can be adjusted according to the paper material anti-roll gear, to ensure that the finished product does not bend.

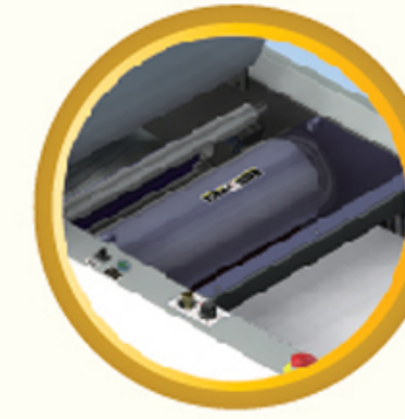

### Oversize roller

Laminating effect is better, suitable for all kinds of material paper.



### Automatic measuring paper

No need to manually input data, automatic measurement of paper length.



### 8 minutes quick heat up

Quickly heat up to working temperature to reduce waiting time.



### Intelligent system

Touch screen control, intelligent system, simple and easy to operate.

Model	3901	3902	3903	4501	4502	4503	5301	5302	5303
Drum width(mm)	350	350	350	450	450	450	550	550	550
Laminating width(mm)	182-350	182-350	182-350	210-450	210-450	210-450	182-550	182-450	182-450
Laminating length(mm)	210-700	210-700	210-700	210-700	210-700	210-700	210-700	210-700	210-700
Thickness(g)	150-300	150-300	150-300	150-300	150-300	150-300	150-300	150-300	150-300
Paper height	/	88	88	/	88	88	/	88	88
Feeding mode	Manual	Air suction	Air suction	Manual	Air suction	Air suction	Manual	Air suction	Air suction
Speed(m/hours)	12	12	12	12	12	12	12	12	12
Maximum membrane roll	300	300	300	300	300	300	300	300	300
Temperature range	0-150	0-150	0-150	0-150	0-150	0-150	0-150	0-150	0-150
110℃ heating time	8-12min	8-12min	8-12min	8-12min	8-12min	8-12min	8-12min	8-12min	8-12min
Digital edge	√	√	√	√	√	√	√	√	√
Automatic breaking	√	√	√	√	√	√	√	√	√
Automatic clutch	√	√	√	√	√	√	√	√	√
Automatic length measurement	/	√	√	/	√	√	/	√	√
Anti-crimp gear	12	12	12	12	12	12	12	12	12
Embossing	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Automatic alignment	/	Optional	√	/	Optional	√	/	Optional	√
Two-reel film	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Double-sided laminating	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Automatic winding	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Display	7 inch touch screen								
Voltage	220V(110V)±10%50Hz(60Hz)								
Power	3000W	4000W	4000W	4000W	4000W	4000W	4000W	4000W	4000W
Dimension(mm)	1800*750	2015*750	2015*750	2160*850	2230*850	2230*850	2230*930	2230*850	2230*850
	*1150	*1150	*1150	*1150	*1150	*1150	*1150	*1150	*1150
N.W(kg)	220	220	220	270	270	270	330	330	330