

S Series

Modular Glue binder with Dual Inverter

Dual Inverter / Flipping line creasing / Cover suction feeder



Model	S490A	S490B	S490E	S660F
Max cover (mm)	L490xW330	L490xW330	L490xW330	L660xW330
Min cover (mm)	L270xW130	L270xW130	L270xW130	L270xW130
Cover weight (gsm)	110-300	110-300	110-300	110-300
Cover feeder volume (mm)	88	88	88	88
Cover feeder	Vaccum suction	Vaccum suction	Vaccum suction	Vaccum suction
Nozzle quantity	8	8	8	8
Floor	/	√	√	√
Digital side guide	/	/	√	√
Turning lines	/	/	√	√
Spine lines	/	/	√	√
Flipping lines	/	/	√	√
N.W. (kg)	≈70	≈95	≈110	≈135
Machine dimension(mm)	700x395x600	700x480x1015	700x480x1015	890x615x1015



Modular Binder Plus
optional Cover
Feeder




Spine / Side /
Grinding Roller



Digital Glue Head
Technology



双
变频
Dual Inverter
Controlling
Technology

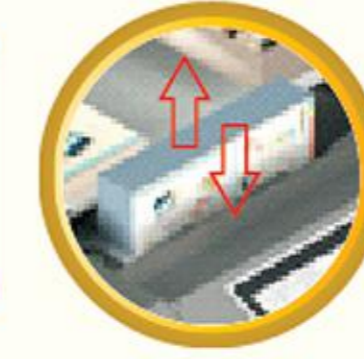

Milling Depth
Quick Changing
Plates



Vertical Clamping
Technology

Model	S5	S6	S7	S8	S9
Max length (mm)	110-330	110-330	110-440	110-460	110-460
Max thickness (mm)	1-58	1-58	1-58	1-58	1-58
Block height (mm)	130-300	130-300	130-300	130-300	130-300
Speed(book/hr)	300-360	300-450	300-420	300-420	300-450
Carriage inverter	√	√	√	√	√
Warming up(min)	≈35min	≈35min	≈35min	≈40min	≈40min
Gluing rollers	3	3	3	4	4
Dangling pre-melt mesh	√	√	√	√	√
Digital glue head	√	√	√	√	√
Glue tail mechanism	√	√	√	√	√
Auto side gluing	√	√	√	√	√
Smoke Extractor	Optional	Optional	Optional	Optional	Optional
Vacuum cleaner	/	/	/	/	√
Reusable milling	√	√	√	√	√
Milling depth swift	√	√	√	√	√
Automatic measurement thickness	√	√	√	√	√
Book platform	√	√	√	√	√
Auto clamping pressure	√	√	√	√	√
Clamping vertical adjustment	√	√	√	√	√
Pre side gluing	/	/	/	/	√
Block jogging	/	/	/	/	√
Book placing table	√	√	√	√	√
Display	7"Touchscreen	7"Touchscreen	7"Touchscreen	7"Touchscreen	7"Touchscreen
N.W. (kg)	≈220	≈240	≈300	≈300	≈320
Inverter	√	√	√	√	√
Power	220V±10% 50Hz(60Hz)				
Voltage	2600W	2600W	2600W	3200W	3400W
Machine dimension(mm)	1320x780x1070	1320x780x1070	1590x780x1070	1750x800x1050	1750x800x1050